


2016 New Edition Let's Make Sweet Homes Together





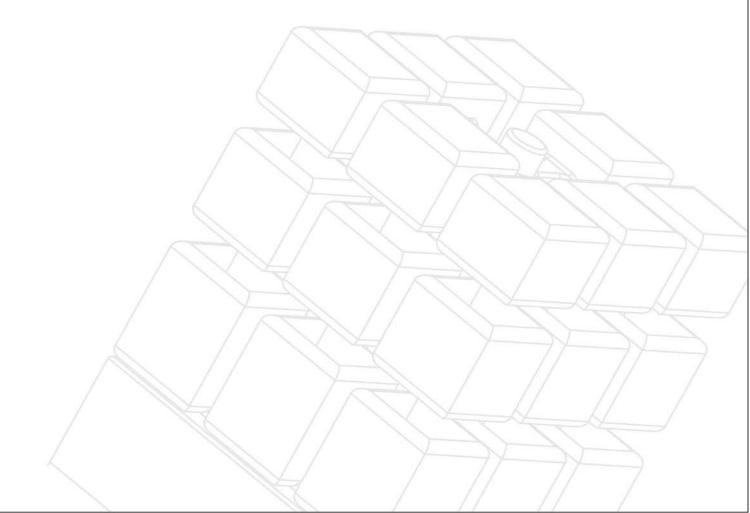

Our Vision

To Illuminate every part of the world

Our Mission

- To be the leading lighting company in Taiwan and China
- To be the best at what customers value most
- To exceed customers expectation
- Treat staffs & customers & substructures as partnership
- Enjoy work as part of life

Our Core Competence

- Innovation
- Integrity
- Efficiency
- Passion
- Responsibility
- Team Work

President's Message

Since its establishment in 1988, Home Resource Ind. CO. Ltd. has been Dedicated to production and Development Of lighting products for Iwo decades. We would like to take Ihis opportunity to express our sincere Appreciation for your Jully supports and concerns over the past 27 years.



Sam Chen Ph.D

President of Home Resource

- Chairman of TLFEA (2004-2007)
 TLFEA: Taiwan Lighting Fixture Export Association
- Director of CEECA and LABC CEECA: The Central, Eastern Europe and CIS Association
 LABC: Latin American Business Council

With years of efforts on upgrading production capability and capacity, Home Resource has grown into a consummate manufacturer of lightings on OEM (original equipment manufacturing) and ODM (original design manufacturing) basis. Globally reputed R&D talent has also helped Home Resource to enhance popularity and recognition of its own-brand products in recent years.

In addition to existing branches, Home Resource has officially operated a newly constructed plant of 26,000 square meters in China (3hong Shan City, Guangdong Province), which employs advanced production equipment to assure even shorter delivery and more considerate services for clients than before.

We strive for success not only in having determination and courage, but also developing innovative products and marketing intelligence base on our core competence: innovation, efficiency, integrity and passion. Home Resource will definitely get hold of past success to carry on growing continuously in the lighting territory now and then. Let's witness the brand new, prosperous Home Resource to achieve an even higher peak of success in the coming future.

Company Profile

Home Resource was established in 1988. Since then, the company has developed Into one of the most professional lighting manufactures in Jaiwan and Mainland China.

Home Resource/Green Resource would



David Chen

General Manager

like to express our sincere thanks to all customers, parts sub-contractors and every one of our employees. It is their continuing support and hard work that has allowed Home Resource/Green Resource to grow as rapidly as they have been able to. HR&GR will continue to make even greater efforts in the future.

Other than a self-support manufacturer, through a presence in Ningbo and Zhongshan and 50 employees, Home Resource also operates a sourcing network of two offices in China.

We strive to attain a position of long-term, sustainable pre-eminence in the lighting field "lighting up" both our customers and ourselves.

Index - Outdoor Lighting





•FLED-592-10 Page04



•FLED-592-20 Page04



•FLED-592-30 Page04



•FLED-592S-10 Page05



•FLED-592P1-10 Page05



•FLED-592SP-10 Page05



•FLED-592ST1-30 Page06



•FLED-592ST2-30 Page06



•FLED-591-08 Page07



•FLED-591-16 Page07



•FLED-591-24 Page07



•GLED-850SP-S3 Page08



•GLED-862SP-S3 Page09



•GLED-863SP-S3 Page09



•ALED-558 Page10



•ALED-558A Page10



•ALED-559 Page10



• ALED-559A Page10



•ALED-586A Page11



•ALED-586B Page11



•ALED-586C Page11



•ALED-587A Page11



•ALED-587B Page11



•ALED-587C Page11



•SMLED-580 Page12



•SMLED-581



•SMLED-582 Page12



•SMLED-583 Page 12



•SMLED-584 Page12



•SMLED-585 Page12



•SMLED-588 Page12

Index - Indoor Lighting





•HGLED-326-6 Page13



•WLED-326 Page13



•TLED-326-2 Page13



•FLED-326-2 Page13



• CMLED-171-4 Page14



•CMLED-171-6 Page14



•TLED-171 Page14



• FLED-171 Page14



•TLED-386 Page15



•TLED-387 Page15



Page 15



•TLED-21BU Page16



•TLED-195C Page16



•TLED-12TLP Page17



•TLED-19 Page17



•TLED-21A Page17



•TLED-111 Page18



•BO-LED74 Page19



•BO-LED99 Page20



BO-LED012 Page20



•BO-LED013 Page20



CKLED327A Page21



•TKLED327A-2 Page21



TKLED327A-3 Page21



•TKLED327A-4 Page21



CK15A Page22



CK15A-3 Page22



TK15A-2 Page22



TK15A-4 Page22



•LLED-T510 Page23



•RPLED-123-S4 Page23

-Glare Free

- •Material: ABS Frame + PC Diffuser + Aluminum Housing
- Voltage: AC 180V ~ 265V
- Color Temperature: 4000K ~ 6500K
- •CRI: Ra>70
- Finish: White Frame + Black Housing
- •IP65




















FLED-592-20 Lamp: 20W (20pcs x 1W SMD2835 LED) Lumen: 1400LM(4000K)





FLED-592-30 Lamp: 30W(30pcs x 1W SMD2835 LED) Lumen: 2100LM(4000K)

-Glare Free

•Material: ABS Frame + PC Diffuser

+ Aluminum Housing (& Spike / Stand)



• Color Temperature: 4000K ~ 6500K

•CRI: Ra>70

• Finish: White Frame + Black Housing(+ Yellow Stand / Black Spike)











•	Lamp	Lumen	Product size
FLED-592S-10	10W (10pcs x 1W SMD2835 LED)	700LM(4000K)	15 x 3,85 x 9.6 (13.2)cm
FLED-592S-20	20W (20pcs x 1W SMD2835 LED)	1400LM(4000K)	19.1 x 4.3 x 12.2 (16)cm
FLED-592S-30	30W (30pcs x 1W SMD2835 LED)	2100LM(4000K)	21.8 x 5.2 x 14 (17)cm

Sensor: 5M, 160", 12 Seconds (Customization available, Max. Up to 30 minutes)









-Glare Free

- Voltage: AC 180V ~ 265V
- Color Temperature: 4000K ~ 6500K
- •CRI: Ra>70
- Finish: White Frame + Yellow Stand
- •IP65















FLED-592ST1-30 Lamp: 30W (30pcs x 1W SMD2835 LED) Lumen: 2100LM(4000K)





FLED-592ST2-30 Lamp: 60W (2 x 30pcs x 1W SMD2835 LED) Lumen: 2 x 2100LM (4000K)

-Glare Free

- •Material: ABS body + PC Diffuser + Aluminum Heat Sink
- Voltage: AC 180V ~ 265V
- Color Temperature: 4000K ~ 6500K
- •CRI: Ra>70
- · Finish: White / Black / Grey Body
- •IP65







■ FLED-591-08 Lamp: 8W (8pcs x 1W SMD2835 LED) Lumen: 700LM (4000K)





● FLED-591-16 Lamp: 16W (16pcs x 1W SMD2835 LED) Lumen: 1400LM (4000K)






• FLED-591-24 Lamp: 24W (24pcs x 1W SMD2835 LED) Lumen: 2100LM (4000K)

LED Garden Light







GLED-850SP-S3

Set of 3


Material: Aluminum Die-Cast + Glass Lamp: Per Head with 1x3W COB LED Color Temperature: 2700~6500K Lumen: 3 x 100LM(4000K)

Each Fitting with 1M SPT-2W (18awg) / 1M H05RN-F 2x0.75mm² cable + DC plug
Each set with 4M SPT-2W (18awg) / 4M H05RN-F 2x0.75mm² extension cable + waterproof female plug + DC plug

Each set with 4M SPT-2W (18awg) / 4M H05RN-F 2x0.75mm² extension cable + waterproof female plug + DC plug With Outdoor Driver

Finish: Black IP44

Assembly

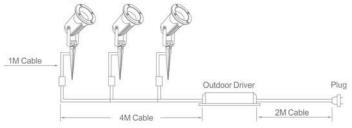

LED Garden Light




- •Set of 3
- •Material: Zinc Alloy + Aluminum + Glass
- •Per head with 1 x 3W high power LED
- Lumen: 3 x 180LM (4000K)
- •Each fitting with 1M SPT-2W (18awg) / H05RN-F 2 x 0.75mm2 cable + DC plug
- Each set with 4M SPT-2W (18awg) / H05RN-F 2 x 0.75mm² extension cable + water-proof Female Plug + DC Plug
- With Outdoor Driver
- •Finish: Black
- •IP44



GLED-862SP-S3





GLED-862SP-S3

Driver Built-in Plastic LED Exterior Bulkhead

CE & EMC



•Material: ABS Body + PC Diffuser

• Voltage: 85V ~ 265V

• Color Temperature: 2700K ~ 6500K

•CRI: Ra≥70

• Finish: Black / White

•IP65



•	Lamp	Lumen	Product size
ALED-558	6W (12pcs x 0.5W SMD5730 LED)	550LM (4000K)	L: 18.7 x W: 12.7 x H: 7cm
ALED-M558	12W (24pcs x 0.5W SMD5730 LED)	1100LM (4000K)	L: 23.9 x W: 16.2 x H: 9.7cm



•	Lamp	Lumen	Product size
ALED-558A	6W (12pcs x 0.5W SMD5730 LED)	430LM (4000K)	L: 18.7 x W: 12.7 x H: 7cm
ALED-M558A	12W (24pcs x 0.5W SMD5730 LED)	860LM (4000K)	L: 23.9 x W: 16.2 x H: 9.7cm



•	Lamp	Lumen	Product size
ALED-559	6W (12pcs x 0.5W SMD5730 LED)	550LM (4000K)	Dia: 17.9 x H: 7.5cm
ALED-M559	12W (24pcs x 0.5W SMD5730 LED)	1100LM (4000K)	Dia: 22 x H: 9.8cm



•	Lamp	Lumen	Product size
ALED-559A	6W (12pcs x 0.5W SMD5730 LED)	430LM (4000K)	Dia: 17,9 x H: 7.5cm
ALED-M559A	12W (24pcs x 0.5W SMD5730 LED)	860LM (4000K)	Dia: 22 x H: 9.8cm

Driver Built-in Plastic LED Bulkhead



•Material: PP Body + PC Diffuser

• Voltage: AC 220V ~ 240V

•Lamp: 6W (36pcs x SMD3528 0.16W LED)

•Power Consumption: 7.4W

• Color Temperature: 4000K ~ 6000K

•CRI: Ra>80

· Finish: Black / Grey / White

•IP44










ALED-586B



ALED-586C













ALED-587B



ALED-587C



Waterproof AC type Plastic LED Brick Light

-Super Slim Surface-Mount design

- •Material: ABS Body + PC Diffuser
- Voltage: AC 220V ~ 240V
- Color Temperature: 4000K ~ 6500K
- •CRI: Ra≥80
- · Finish: Black / Grey / White
- •IP65







Surface-Mount










SMLED-580


1.8W (30pcs x 0.06W SMD3014 LED) 190LM (4000K)






SMLED-588

0.5W (9pcs x 0.06W SMD3014 LED) 25LM (4000K)





2.1W (35pcs x 0.06W SMD3014 LED) 90LM (4000K)





SMLED-582

2.7W (45pcs x 0.06W SMD3014 LED) 250LM (4000K)





SMLED-584

2.4W (40pcs x 0.06W SMD3014 LED) 220LM (4000K)





SMLED-583

1W (16pcs x 0.06W SMD3014 LED) 50LM (4000K)





SMLED-585

1.2W (20pcs x 0.06W SMD3014 LED) 60LM (4000K)



LED Dining/Wall/Table/Floor Lamp

-Flyer

• Material: Zinc Alloy + Iron + PMMA (+ Stainless Steel)

· Finish: Matt Black






•HGLED-326-6

With 6 Lights x 4.8W (24pcs x 0.2W SMD2835 LED per Light) With Built-in Driver Lumen: 1100LM (4000K)
Cable length is adjustable, Max. up to 800mm



tate 110 degrees



WLED-326

With 4.8W (24pcs x 0.2W SMD2835 LED) With Built-in Driver Lumen: 268LM (4000K) Stainless Steel Mounting Plate





•TLED-326-2

With 2 Lights x 4.8W (24pcs x 0.2W SMD2835 LED per Light) With Driver and 1.5m Cable + Line Switch Lumen: 388LM (4000K) Lux: 1100Lux (H. 30cm)



FLED-326-2

With 2 Lights x 4.8W (24pcs x 0.2W SMD2835 LED per Light)
With Driver and 1.8m Cable + Foot Switch Lumen: 388LM (4000K)

LED Interior Ceiling/Table/Floor Lamp

-UFO

•Material: Iron + PMMA

· Finish: Satin Nickel





With 4 Lights x 5W (28pcs x 0.18W SMD2835 LED per Light) With Built-in Driver Lumen: 1040LM (4000K)

Lampshade: 2 x Dia.160mm + 2 x Dia.120mm







CMLED-171-6

With 6 Lights x 5W (28pcs x 0.18W SMD2835 LED per Light) With Built-in Driver

Lumen: 1560LM (4000K)

Lampshade: 3 x Dia.160mm + 3 x Dia.120mm



TLED-171

With 5W (28pcs x 0.18W SMD2835 LED) With Driver and 1.5M Cable + Line On/Off Switch

Lumen: 260LM (4000K) Lux: 1000Lux (H.30cm) Lampshade: 1 x Dia.120mm



FLED-171

With 5W (28pcs x 0.18W SMD2835 LED) With Driver and 1.8M Cable + Foot On/Off Switch Lumen: 260LM (4000K) Lampshade: 1 x Dia.160mm

Wireless Charging LED Table Lamp


-For iPhone 5 / 6 series

- •Material: ABS + Iron
- •With Stepless Dimming Swtich on Base
- •With Driver and 1.5m Cable
- •With USB Slot(Output: 5V 1A)
- ·Finish: White/Black









TLED-386

With 5W (30pcs x 0.16W SMD2835 LED) Lumen: 390LM (4000K) Lux: 1500Lux (H. 30cm) Power Consumption: 18W (Including Wireless Charging Modules)






TLED-387

With 4W (12pcs x 0.35W SMD5630 LED) Lumen: 260LM (4000K) Lux: 1100Lux (H. 30cm) Power Consumption: 16.5W (Including Wireless Charging Modules)





TLED-388

With 5.4W (27pcs x 0.2W SMD2835 LED) Lumen: 320LM (4000K) Lux: 1600Lux (H. 30cm) Power Consumption: 18W (Including Wireless Charging Modules)

GWireless Charging LED Table Lamp

-For iPhone 5 / 6 series







TLED-21BU

Material: ABS Body

Lamp: 6W (12 x 0.5W SMD5630 LED Modules) Luminous Flux: 440LM (4000K)

Lux: 1200Lux(H.40cm)

With USB Slot (Output: 5V 500mA)

Power Consumption: 17.5W (Including wireless charging modules)

With Driver and 1.5m Cable Finish: White/Black

Being folded when not in working





TLED-195C

Material: ABS Head & Base + Iron Tube


Lamp: 3W (6pcs x 0.5W SMD5630 LED Modules)

Power Consumption: 4.5W

Luminance: > 900 Lux (30cm) / Luminous flux: 200LM (4000K)

With Stepless Dimming Swtich on Base

With USB Slot (Output: 5V 1A) With Driver and 1.5m Cable Finish: Black/White/Green




LED Table Lamp









TLED-12TLP

Material: ABS Head & Base + Iron tube Lamp: 3W (6 x 0.5W SMD 5630 LED) Power consumption: 4.5W Luminous flux: 210LM (4000K) Super Bright 980Lux (30cm) With Touch On/Off Switch on Base
With Blue LED indicator surrounded the switch With Driver and 1.5m Cable
Finish: Injection Black / Injection White





TLED-19

Material: Aluminum + Iron Lamp: 6 x 0.5W SMD5630 LED With Driver and 1.5M Cable + Line Switch Luminous Flux: 180LM (4000K) Lux: 800Lux (H. 30cm) Finish: Matt Black



TLED-21AU

Material: ABS Body Lamp: 6W (12 x 0.5W SMD5630 LED Modules) Luminance: > 1200 Lux (40cm) / Luminous flux: 440LM (4000K)

Power consumption: 9W With 4 Section Touch Switch on Base: White-Blue-White+Blue-Off

White (Main light); Blue (Night Light)
With Night Light: 6 x 0.06W Φ5 Blue LEDs
With USB Slot (Output: 5V 1A)

With Driver and 1.5m Cable

Finish: Painting White / Painting Black / Rubber White / Rubber Black

LED Table Lamp

















• TLED-111

Material: ABS + Iron
Lamp: 3W (6 x 0.5W SMD5630 LED)
Ra>80
Finish: White/Black/Yellow/Green/Blue/Pink
Lumen: 210LM (4000K)
Super Bright 880 Lux (H.30cm)
Built-in LED Driver
1.8M Cable + Plug 1.8M Cable + Plug On/Off Switch on base

Multi-Function Battery Operated LED Sensor Light

-Robot







Motion sensor-Off-On



Battery cover














●BO-LED74

Material: ABS Lamp: 2 x 0.4W SMD5630 Modules Power consumption: 0.8W Luminous flux: 25LM (4000K) Finish: White Battery: 3 x AAA(Excl.)
Battery: Working Time at "ON" mode: 8H
With 3 Section Slide Switch: Motion Sensor-OFF-ON

Motion Sensor: 2M, 120°, Time Delay (18 Sec +/-5 Sec.)

Multi-Function Battery Operated LED Sensor Wall Light

-For Porch, Wall, wardrobe ... use











Dry cell battery 3 x AAA 1.5V (EXCL.)

Lamp: 6 x 0.06W LED Lumen: 36LM(4000K)

Battery Working Time at "ON" mode: 12H With 3-Section Slide Switch: Motion Sensor-OFF-ON


Motion Sensor: 2M, 120° Time Delay (18 Sec +/-5 Sec.) Finish: Injected White











BO-LED012

Material: PMMA + PC

Dry cell battery 3 x AAA 1.5V (EXCL.)

Lamp: 10 x 0.06W LED Lumen: 40LM(4000K)

Battery Working Time at "ON" mode: 8H

With 3-Section Slide Switch: Motion Sensor-OFF-ON Motion Sensor: 2M, 120° Time Delay (18 Sec +/-5 Sec.)

Finish: Injected White


















• BO-LED013

Material: ABS + PMMA Dry cell battery 3 x AAA 1.5V (EXCL.)

With 12 x 0.06W white LEDs

Lumen: 22LM(4000K)

Battery Working Time at "ON" mode: 8H

With 3-Section Slide Switch: Motion Sensor-OFF-ON Motion Sensor: 2M, 120° Time Delay (18 Sec +/-5 Sec.)

Finish: Injected White





AC type Built-in LED Spot / Wall / Ceiling Light



- •Material: Iron Base + Plastic Shade
- •AC type Built-in 4W (26pcs x 0.16W SMD2835) LED for each head
- ·Voltage: 230V
- •Lumen: 400LM per Head (4000K)
- Finish: Black / White / Silver Painting or Chrome Plated



Energy Saving Wall / Ceiling & Spot Light Fixture



- ·Material: Iron
- •Lamp: GU10 COB 4W LED per Light (Bulb Incl.)
- •Lumen: 400LM per Light (4000K)
- Finish: Chrome





CK15A







CK15A-3







■TK15A-4



Linkable LED Strip Light / LED Cabinet Light





Material: PC base + PC diffuser Finish: White Input voltage: AC220-265V 1.5M white link mains cable + plug With 15cm connecting cable



•	No. of Leds	Watt	Prod. Dimension	Luminous Flux
LLED-T504	20pcs 2835 LED	4	L313 x W22 x H38mm	360LM(4000K)
LLED-T508	40pcs 2835 LED	8	L575 x W22 x H38mm	680LM(4000K)
LLED-T510	50pcs 2835 LED	10	L875 x W22 x H38mm	865LM(4000K)
LLED-T515	75pcs 2835 LED	15	L1149 x W22 x H30mm	1400LM(4000K)
LLED-T518	90pcs 2835 LED	18	L1450 x W22 x H30mm	1644LM(4000K)

RPLED-123-S4

Set of 4
Material: Plastic
Lamp: 5.6W (1.4W per Strip x 4 Strips)

Lumen Flux: 100LM per strip x 4 strips (4000K)

Including LED driver, Line On/Off Switch, cable and connectors

Finish: White

(Product size: L.30 x W.1cm per Strip)





China Factory - 26,000m² (Zhongshan City, Guangdong Province)

Home Resource's products are designed and manufactured by its own factory(Green Resource) sited in Zhongshan, China.







Manufacturer • Buying Agent • Inspection Agent



Home Resource Ind. Co., Ltd.

4F, No. 69-5, Sec. 2, Chung Cheng East Rd., Tanshui District 25170, New Taipei City, Taiwan

Tel: 886-2-2809-1212 (Rep. 12Lines) Fax: 886-2-2808-1565

E-mail: hr@homeresource.com.tw www.homeresource.com.tw

Factory : Green Resource Illumination Co., Ltd. (ZhongShan)

No. 8, Yanjiang W. 1st Rd., Keji Ave., Torch Development Zone, Zhongshan City,

Guangdong, China

廣東省中山市火炬開發區科技大道沿江西一路8號



